



**salerno
pompetti**®



...sollevati e sicuri
...lifted and safe

Montacarichi porta persone/materiale
Material/Passenger hoist

MT 2500 TWIN

MT 2500 TWIN

Montacarichi porta persone/materiale
Material/Passenger hoist

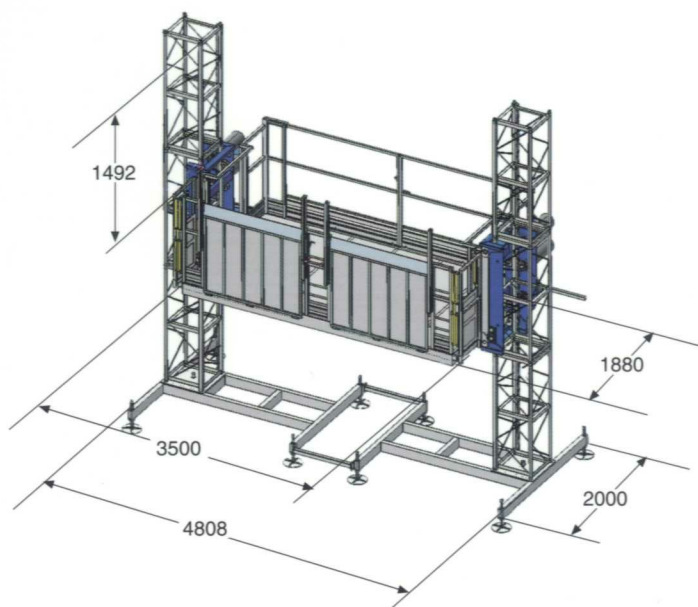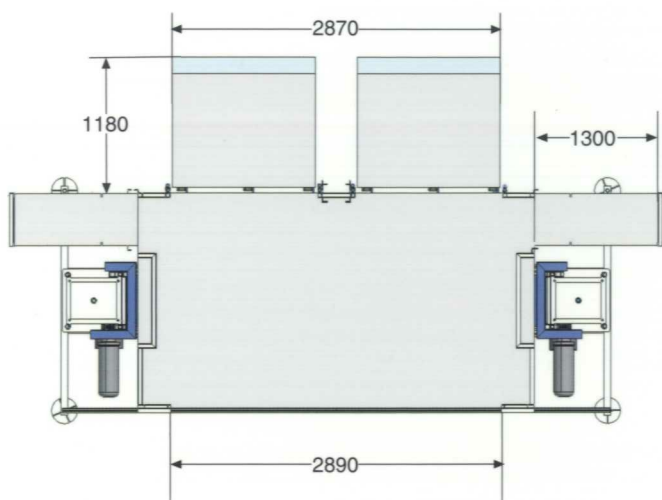

MT 2500 TWIN	2500 Kg.	
	2400 Kg.	
	2300 Kg.	
	2200 Kg.	
	2100 Kg.	

Dati Tecnici*	Technical Data*	Données Techniques*	Datos Tecnicos*	
Capacità di carico	Capacity	Capacité de charge	Capacidad de carga	2.500 Kg.
Velocità di sollevamento	Lifting speed	Vitesse de levage	Velocidad de elevación	12/24 m/min.
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	300 m
Tensione di alimentazione	Supply voltage	Tension d'alimentation	Tensión de red	400/50 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	32 A
Potenza servizio continuo	Power of the motors	Puissance moteur	Potencia de motorreductores	4 X 4 Kw
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	220 A
Minima potenza di linea consigliata	Minimum line power required (suggested)	Min. puissance de ligne conseillée	Min. potencia linea	20 Kw
Peso traliccio ■	Trellis weight ■	Poids pylône ■	Peso terliz ■	58 Kg.

* Consultare manuale d'uso - Refer to the use handbook - Consulter manuel d'usage - Consultar manual de uso

salerno ponteggi

Salerno Ponteggi s.r.l.
via S. Leonardo 236/i - 84131 Salerno
Tel. +39 089 302055 Fax +39 089 7724414
www.salernoponteggi.it - ufficiomarketing@salernoponteggi.it